
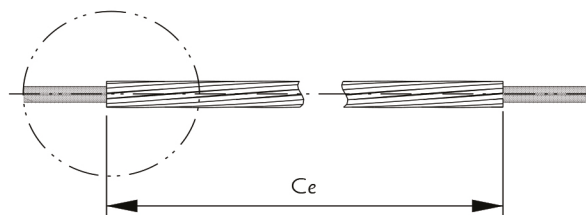


## Armadura Heliformada

## Varillas Preformadas

## Armor Rod



Referência		Dimensões   Dimensiones   Dimensions (mm)					Peso	
N° Catalogo	Acomodação						Peso Neto	
Cat. Number	Alojamiento						Net Weight	
	Clamping Range	ØMin	ØMax	Ce	Varetas Varillas Rod Ø	N° Varetas N° Varillas Rod per set	Cor Color (kg)	
F4010-0X		4,92	5,27	1016	3,71	7	Azul   Blue	0,150
F4010-1X		5,28	5,57	1016	3,71	7	Preto   Negro   Black	0,150
F4010-2X		5,58	5,80	1016	3,71	8	Branco   Blanco   White	0,170
F4010-3X		5,81	6,18	1016	3,71	8	Marron   Brown	0,170
F4010-4X		6,19	6,59	1016	3,71	7	Laranja   Anaranjado   Orange	0,220
F4010-5X		6,60	6,94	1067	3,71	7	Verde   Green	0,230
F4010-6X		6,95	7,35	1067	3,71	8	Amarelo   Amarillo   Yellow	0,260
F4010-7X		7,36	7,83	1067	3,71	8	Púrpura   Purple	0,260
F4010-8X		7,84	8,29	914	3,71	9	Vermelho   Rojo   Red	0,260
F4010-9X		8,30	8,80	1168	3,71	9	Azul   Blue	0,320
F4011-0X		8,81	9,31	1219	3,71	9	Verde   Green	0,330
F4011-1X		9,32	9,89	1270	3,71	10	Preto   Negro   Black	0,380
F4011-2X		9,90	10,50	1321	4,24	9	Amarelo   Amarillo   Yellow	0,480
F4011-3X		10,51	11,08	1321	3,71	10	Marron   Brown	0,410
F4011-4X		11,09	11,77	1372	4,24	10	Azul   Blue	0,550
F4011-5X		11,78	12,46	1372	4,24	10	Verde   Green	0,550
F4011-6X		12,47	13,24	1422	4,24	11	Laranja   Anaranjado   Orange	0,620
F4011-7X		13,25	14,01	1473	4,24	11	Preto   Negro   Black	0,650
F4011-8X		14,02	14,87	1524	4,62	11	Vermelho   Rojo   Red	0,800
F4011-9X		14,88	15,40	1575	4,62	12	Preto   Negro   Black	0,890

Referência	Dimensões   Dimensiones   Dimensions (mm)						Peso
Nº Catalogo	Acomodação Alojamiento		Ce	Varetas Varillas Rod Ø	Nº Varetas Nº Varillas Rod per set	Cor Color	Peso Neto
Cat. Number	Clamping Range						(kg)
	ØMin	ØMax					
F4012-0X	15,41	16,01	1626	4,62	12	Púrpura   Purple	0,930
F4012-1X	16,02	16,65	1626	4,62	12	Amarelo   Amarillo   Yellow	0,940
F4012-2X	16,66	17,26	1676	4,62	13	Marron   Brown	1,030
F4012-3X	17,27	17,87	1727	5,18	12	Azul   Blue	1,300
F4012-4X	17,88	18,81	1829	5,18	12	Verde   Green	1,300
F4012-5X	18,82	19,87	1829	5,18	13	Laranja   Anaranjado   Orange	1,415
F4012-6X	19,88	20,69	1930	6,35	11	Púrpura   Purple	1,920
F4012-7X	20,70	21,47	1930	6,35	11	Vermelho   Rojo   Red	1,920
F4012-8X	21,48	23,05	1981	6,35	12	Azul   Blue	2,150
F4012-9X	23,06	23,61	2032	6,35	13	Verde   Green	2,400
F4013-0X	23,62	24,80	2235	6,35	13	Branco   Blanco   White	2,610
F4013-1X	24,81	25,82	2337	7,87	11	Amarelo   Amarillo   Yellow	3,550
F4013-2X	25,83	26,30	2388	7,87	12	Marron   Brown	3,970
F4013-3X	26,31	27,04	2438	7,87	12	Azul   Blue	4,100
F4013-4X	27,05	27,90	2438	7,87	12	Verde   Green	4,100
F4013-5X	27,91	28,94	2540	7,87	12	Laranja   Anaranjado   Orange	4,150
F4013-6X	28,95	29,50	2540	7,87	13	Púrpura   Purple	4,350
F4013-7X	29,51	30,69	2540	7,87	13	Vermelho   Rojo   Red	4,550

Material: Liga de alumínio | Aleación de aluminio | Aluminum alloy.

Para uso com cabos: CAA, CA, AAAC e ACAR

Para uso con cables: ACSR, AAC, AAAC y ACAR

For use with cables: ACSR, AAC, AAAC and ACAR

Ruptura: 60% da carga de ruptura do cabo.

Carga de rotura: 60 % de la carga de rotura del cable.

Ultimate Strength (kN): 60% of cable ultimate strength.

Carga de Escorregamento: 25% da carga de ruptura do cabo

Carga de Deslizamiento: 25 % de la carga de rotura del cable

Slipping Load : 25% ultimate strength of cable

0 = Lixado | Lijada | Sanded  Acabamento

X = 1 = Bola | La Pelota | Ball  Acabamiento

2 = Bico Papagaio  
Bico de Loro  Rod end  
Beak Parrot